



EXCEL<sup>®</sup>  
CLASSIC FLOORS

2016 17  
new collection



**Stepper**

PVC DECOR PLANKS

PRODUCT UNDER QUALITY SUPERVISION WITH ISO 9000 ISO 14004 STDS



EXCEL<sup>®</sup>  
CLASSIC FLOORS

2 MM

**Stepper**  
PVC DECOR PLANKS  
2mm x 6" x 36"



W 401



W 402



W 817



W 905



W 906



W 907



W 1475



Tw517115



EXCEL<sup>®</sup>  
CLASSIC FLOORS


*Stepper*

PVC DECOR PLANKS  
2mm x 6" x 36"

2 MM



W 2701

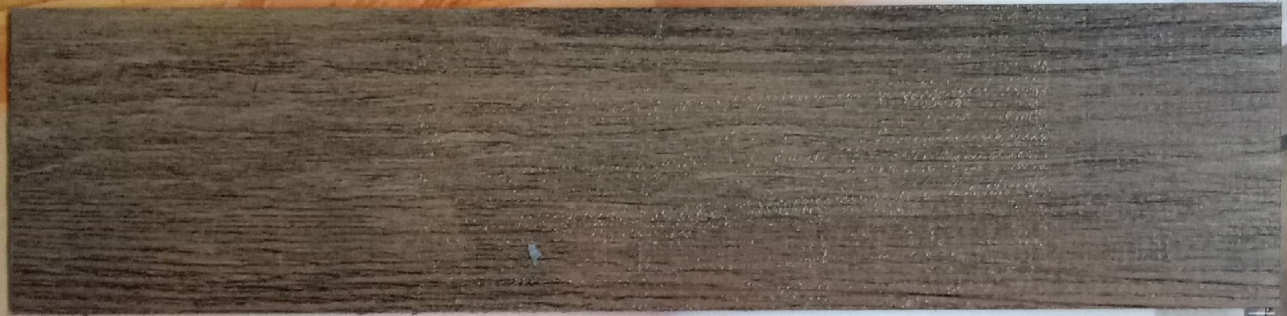

W 2802



W 2704



EXCEL<sup>®</sup>  
CLASSIC FLOORS

1.5 MM

**Stepper**  
PVC DECOR PLANKS  
1.5mm x 6" x 36"



W 802



W 803



W 804



W 815



W 817



W 823



W 824



YH1051106



EXCEL<sup>®</sup>  
CLASSIC FLOORS

# 1.5 MM *Stepper*

PVC DECOR PLANKS  
1.5mm x 6" x 36"



W 901



W 902



W 903



W 904



W 910



W 915



YH103715



TH1054701

**PHYSICAL SPECIFICATIONS**

Plank	152.4mm x 914.4mm heterogenous PVC plank
Finish	Matt dry back
Thickness	1.5mm 2.0mm
Weight	3.17kg/m <sup>2</sup> 3.45kg/m <sup>2</sup>
Wear Layer	0.07mm 0.1mm clear pvc
Printed Layer	High resolution pvc film print
Standard Packing	1.5mm : 4.86 Sq.mtr / Box 2.0mm : 3.75 Sq.mtr / Box

**Technical Data of PVC PLANK**

Characteristic	En423 : 93 Pass Class 0
Resistance Of Chemicals	EN425 : 94 Pass
Bearing A Castor	EN427 : 94 Pass
Dimension Squareness And Straightness	EN428 : 93 Pass
Thickness-wearlayer	EN429 : 93 Pass
Residual Indentation After Static Load	EN433 : 94 Pass
Dimensional Stability Curling After Exposure To Heat	EN434 : 94 Pass
Shrinkage Rate	≤0.25%
Curling	≤2mm
Flexibility	EN660-1/2 Pass Bend around 20mm mandrel show no Sign of cracking
Abrasion Resitance	EN660-1/2 Pass
Color Fastness To Light	EN20 ISO 105-B02 6 or Above Pass
Toxic Element Test	EN71-3 Pass
Specific Gravity	ASTM D792:91 Pass
Coefficients Of Friction	ASTM D1894:01 Pass
Sound Redaction	DIN52210 : 4ab
Flammability	EN71-2 Pass
Smoke Density	DIN4102 / ASTM D2843-99 : Class BI
Electrical Resistance	EN1081 Method C:PASS
Fungus Test	ASTM G21:96 Pass Grade 1

**Application:**

1)Semi commercial

2)Residential



Colours in the catalogue and actual production may differ and its allowed and accepted practice.

